


# PVC Duct


## STANDARD TYPE

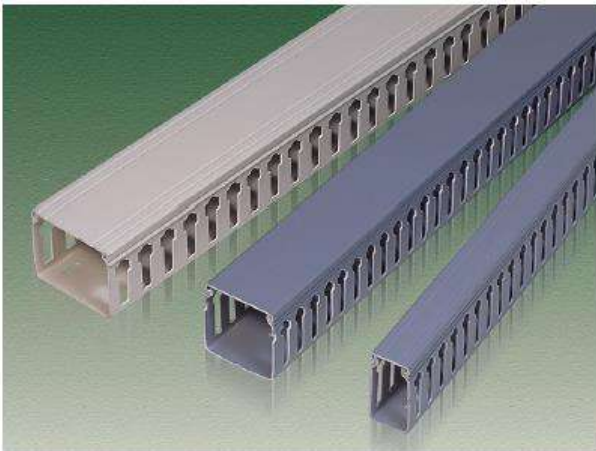


- This product has passed the flame retardancy test by the Korea Electrotechnology Research Institute.
- Offers a wide range of specifications for selection, and with its sturdy bonding, the lid does not easily open

### ■ Dimension

(m/m)							
품 번	L	W	H	품 번	L	W	H
CYCWD-S2030	2000	20	30	CYCWD-S40100	2000	40	100
CYCWD-S2540	2000	25	40	CYCWD-S6040	2000	60	40
CYCWD-S2560	2000	25	60	CYCWD-S6060	2000	60	60
CYCWD-S3040	2000	30	40	CYCWD-S6080	2000	60	80
CYCWD-S3060	2000	30	60	CYCWD-S8060	2000	80	60
CYCWD-S3080	2000	30	80	CYCWD-S8080	2000	80	80
CYCWD-S4040	2000	40	40	CYCWD-S80100	2000	80	100
CYCWD-S4060	2000	40	60	CYCWD-S10080	2000	100	80
CYCWD-S4080	2000	40	80	CYCWD-S100100	2000	100	100

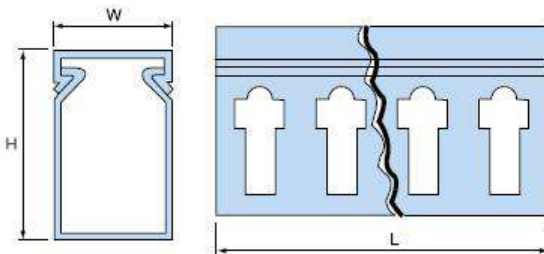


## DOUBLE-BONDED TYPE

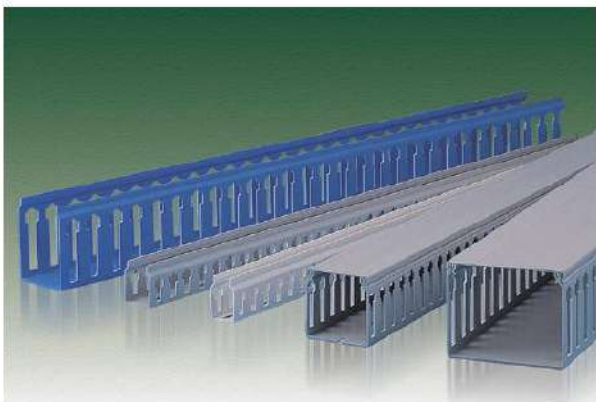

- It features a perfect double-bonded structure, ensuring that the lid does not slip or come off after sealing.
- Manufactured with the latest mold equipment, it is highly durable.
- This product has passed the flame retardancy test by the Korea Electrotechnology Research Institute.


### ■ Dimension

(m/m)							
품 번	L	W	H	품 번	L	W	H
CYCWD-N2030	2000	20	30	CYCWD-N6040	2000	60	40
CYCWD-N2540	2000	25	40	CYCWD-N6060	2000	60	60
CYCWD-N2560	2000	25	60	CYCWD-N6080	2000	60	80
CYCWD-N3040	2000	30	40	CYCWD-N60100	2000	60	100
CYCWD-N3060	2000	30	60	CYCWD-N8060	2000	80	60
CYCWD-N4030	2000	40	30	CYCWD-N8080	2000	80	80
CYCWD-N4040	2000	40	40	CYCWD-N80100	2000	80	100
CYCWD-N4060	2000	40	60	CYCWD-N10060	2000	100	60
CYCWD-N4080	2000	40	80	CYCWD-N10080	2000	100	80
CYCWD-N40100	2000	40	100	CYCWD-N100100	2000	100	100

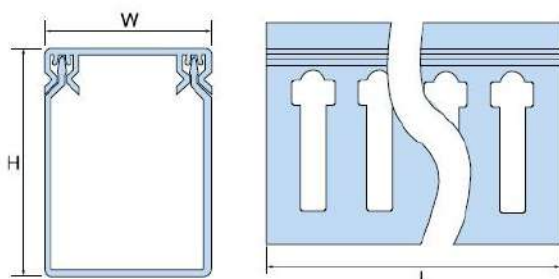


# PVC Duct

## OPEN TYPE

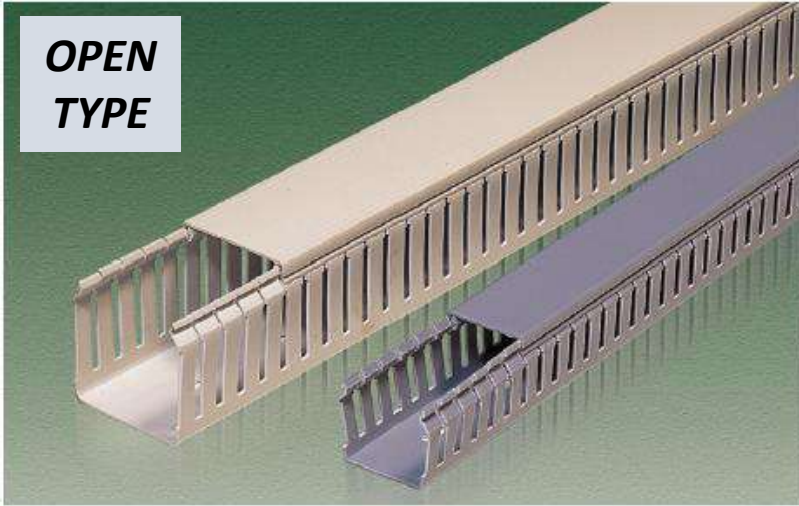

## CLOSED TYPE

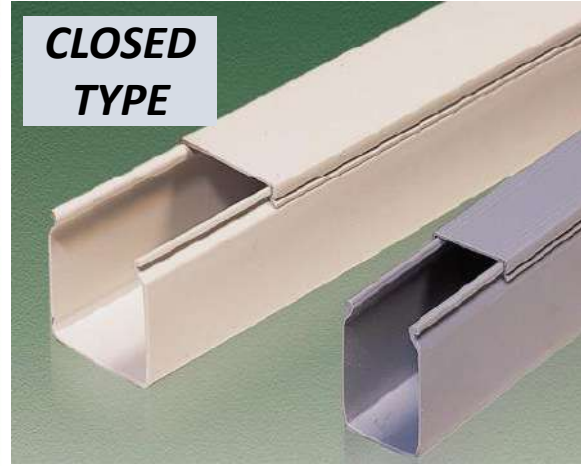

- The top of the duct is open, making wiring easy.
- The small spacing between the wiring outlets gives it a neat appearance and allows for convenient connections with other devices

품 번	L	W	H	품 번	L	W	H
CYCWD-SO2540	1500	25	40	CYCWD-SO4040	1500	40	40
CYCWD-SO2560	1500	25	60	CYCWD-SO4060	1500	40	60
CYCWD-SO3040	1500	30	40	CYCWD-SO6060	1500	60	60
CYCWD-SO3060	1500	30	60				

## DOUBLE-BONDED SEAL TYPE

