


4-8

푸쉬 락 스위치
Push Lock Switch

■  ■  ■  ■ IP 65

형식 구분도 | Type Classification Diagram |

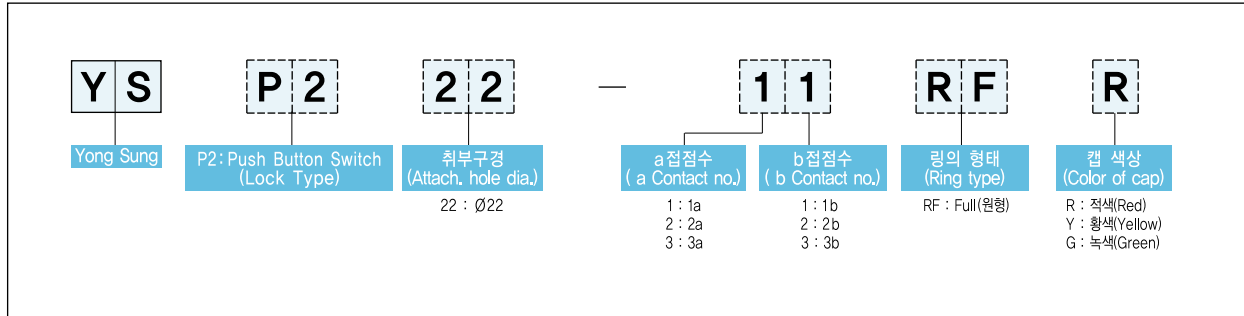

특징 | Features |

- 하부 착탈 부착방식으로 개발되어 하부연결이 간편합니다.
- a접점 하부와 b접점 하부 분리가 가능합니다.
- Easy to combine and under part.
- Possible to separate of A and B contract.

성능 개요 | Performance Summary |

절연저항 (Insulation resistance)	100MΩ 이상 (Above 100MΩ) (DC 500V, Meg)
접촉저항 (Contact resistance)	50mΩ 이하 (초기치) (Below 50mΩ, initial value)
내전압 (Withstand voltage)	AC 2500V/min (60Hz)
기계적수명 (Mechanical lifetime)	50만회 이상 (Above 500,000 times) (20 times/min)
전기적수명 (Electrical lifetime)	10만회 이상 (Above 100,000 times) (20 times/min)
사용주위온도 (Ambient temperature)	-20℃ ~ +55℃
상대습도 (Relative Humidity)	45 ~ 85%

부품 재질 | Part Materials |

부품 (Part)	재질 (Materials)
하부 (Contact block)	PC 수지 (Polycarbonate resin)
홀더 (Holder)	PC 수지 (Polycarbonate resin)
접점 (Contact)	은합금 (Silver alloy)
단자 (Terminal)	황동 (Brass)
볼트 (Bolt)	탄소강 (Carbon steel)
캡 (Cap)	PC 수지 (Polycarbonate resin)
링 (Ring)	ABS 내열 수지 (Heat resistance ABS resin)

정격 | Rated |


정격절연전압 (Rated insulation voltage)		AC600V, DC250V		
정격통전전류 (Rated conductive current)		15A		
AC	정격사용전압 (Rated voltage)	110V	220V	440V
	저항부하 (Resistive load)	10A	6A	3A
	유도부하 (Inductive load)	2.4A	1.2A	0.5A
DC	정격사용전압 (Rated voltage)	110V	125V	220V
	저항부하 (Resistive load)	2.2A	1.9A	1.1A
	유도부하 (Inductive load)	1.1A	1.0A	0.4A

4

Ø22
시리즈


외형 / 치수도 | Shape / Dimension Drawing |

(unit : mm)

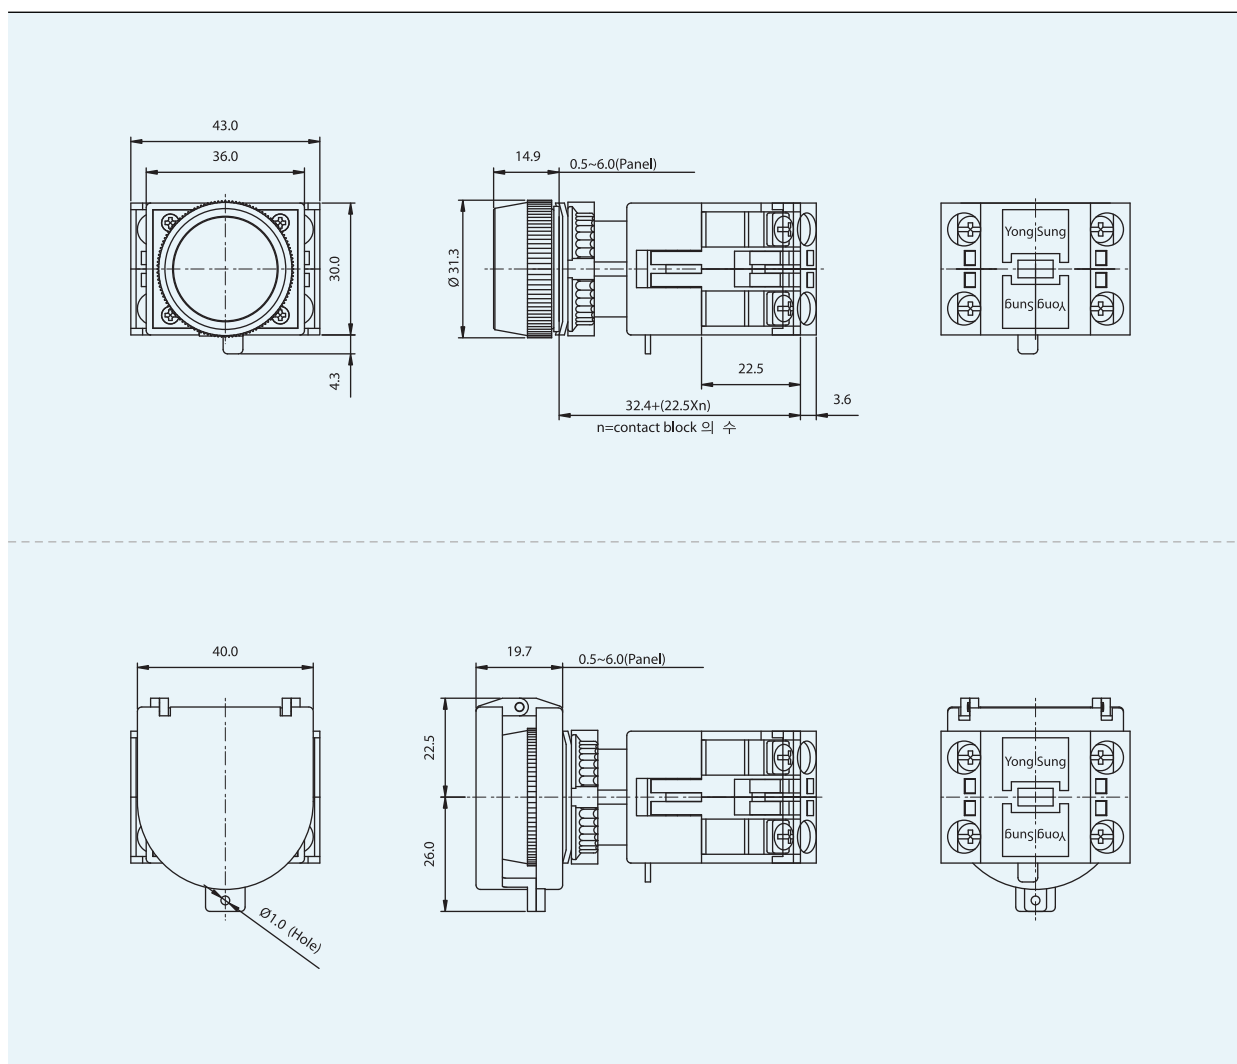

판넬 가공 치수 | Cut-out Dimension |

(unit : mm)



조각면 치수 | Size of Marking Plate |

(unit : mm)

