





Heavy duty connector HE series 24 poles



HE-024-M



HE-024-F



HE-024有普通金属单扣和塑料保护盖
HE-024有普通金属双扣和塑料保护盖

工作电流: 16A

工作电压: 400/500V

阻燃等级(据UL94): V0

防护等级: IP65

接线形式: 螺钉压接

弹片压接

冷压针压接

电缆入口可选螺纹:

PG21, PG29, M32

Rated current: 16A

Rated voltage: 400/500V

Flammability acc. to UL94: V0

Degree of protection acc. to
DIN40 050: IP65

Terminal: Screw terminal

Spring terminal

Crimp terminal

Thread: PG21, PG29, M32



H24B-TS-PG21



H24B-TG-PG21



H24B-TSH-PG29



H24B-TG-PG21



H24B-AG



H24B-AG



H24B-SGR



H24B-SGR

HDC-HE-024-1

侧面进线/Side entry

HDC-HE-024-2

正面进线/Top entry

HDC-HE-024-3

侧面进线/Side entry

HDC-HE-024-4

正面进线/Top entry



H24B-TS-RO



H24B-TG-RO



H24B-TGHB-2*PG21



H24B-TGH-RO



H24B-AD-LB



H24B-SGR-LB



H24B-AD-LB



H24B-SDR-LB

HDC-HE-024-1DB

侧面进线/Side entry

HDC-HE-024-4D

正面进线/Top entry

HDC-HE-024-2B

正面进线/Top entry

HDC-HE-024-4DB

正面进线/Top entry

Hood & Housing

H24B 上壳 H24B hood	螺纹 Thread	型号 Type	图纸 Drawing
----------------------	--------------	------------	---------------

外壳上壳: 侧面进线
Hood: Side entry



外壳上壳: 顶部进线
Hood: Top entry



H24B 上壳/底座 H24B hood/housing	螺纹 Thread	型号 Type	图纸 Drawing
---------------------------------	--------------	------------	---------------

外壳上壳: 顶部进线
Hood: Top entry



外壳底座: 开孔安装
Bulkhead: mounted



外壳底座: 表面安装
Surface mounted: Side entry






4耳带盖底座
Bulkhead mounted with 2 bolts



Hood & Housing

H24B 上壳 H24B hood	螺纹 Thread	型号 Type	图纸 Drawing
----------------------	--------------	------------	---------------

外壳上壳: 侧面进线
Hood: Side entry

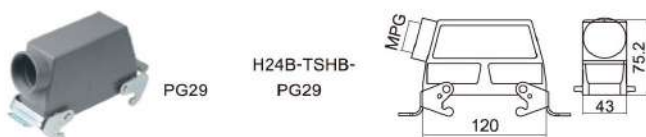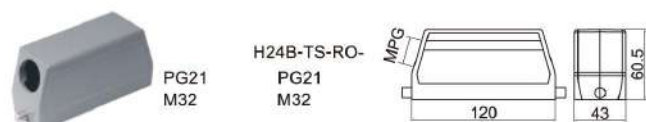

外壳上壳: 顶部进线
Hood: Top entry



H24B 上壳 H24B hood	螺纹 Thread	型号 Type	图纸 Drawing
----------------------	--------------	------------	---------------

外壳上壳: 顶部进线
Hood: Top entry

